


CRAD-XTM

INSULATED PIPE SUPPORTS

500

CRAD-XTM

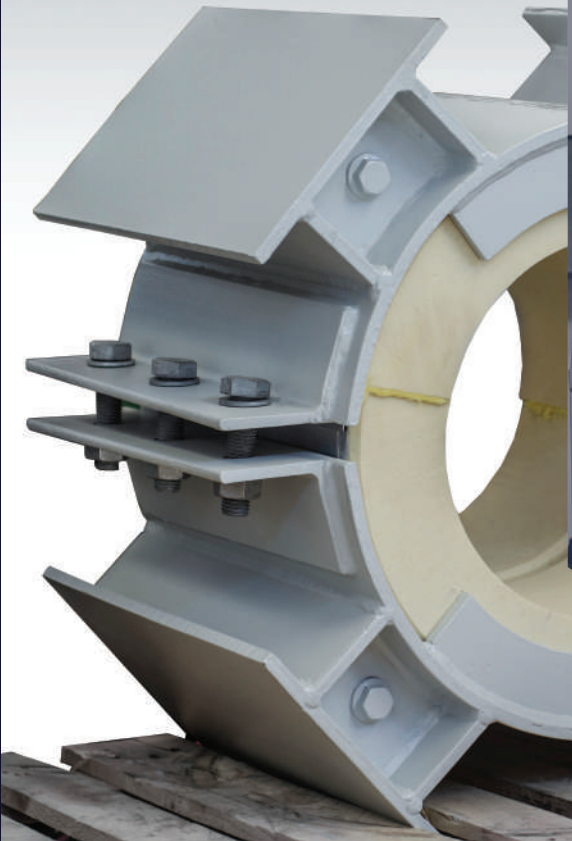

Misalla Industry & Chemicals

CONTACT

Tel. : (+ 203) 4263588
011 544 52 494
Fax. : (+ 203) 4263589
e-mail : info@misalla.com



CRAD-XTM

500

HIGH DENSITY POLYURETHANE FOAM PIPE SUPPORTS

HIGH DENSITY POLYURETHANE FOAM PIPE SUPPORTS

PROPERTIES	TEST METHOD	VALUE
Temperature	Upper	+149°C
	Lower	-183°C
Density	ASTM D1622	500 Kg/m ³
Compressive Strength (At 20°C)	ASTM D1621	20.2 Mpa
Compressive Strength (At -160°C)	ASTM D1621	35.6 Mpa
Tensile Strength (At 20°C)	ASTM D1623	10.62 Mpa
Tensile Strength (At -160°C)	ASTM D1623	14.89 Mpa
Closed Cell Content	ASTM D2856	95%
Thermal Conductivity @ 20°C	ASTM C177	0.062 W/m.k
Thermal Conductivity @ -160°C	ASTM C518	0.058 W/m.k
Leachable Halides	ASTM D871	Less than 20 Ppm
Water Absorption	ASTM C2842	0.1 (Max. Vol%)

CRAD
500 XTM

Revision: 03

Issued: 2021



TEL. (+203) 4263588
(+20) 1154452494
FAX. (+203) 4263589

OFFICE ADDRESS St. 20, Smouha Green Towers, Tower no. 4 ,
Smouha, Alexandria - Egypt.

FACTORY ADDRESS Petrochemical Rd. Merghem Amria -
Alexandria - Egypt

MAIL info@misalla.com

WEBSITE www.misalla.com